Certificate of Appropriateness

For The Colorado Business Bank 2409 W. Main Street Case No. COA18-0003

Statement of intent:

The existing vacant building at 2409 W. Main St. in Littleton which is currently vacant, will be converted from a bank into a brewpub.

Most changes will occur within the existing space.

Changes to the exterior of the building will be:

- 1. A new hvac unit will be added to the roof which will require the addition of a mechanical screen.
- 2. And a new set of exit doors on the east side of the building will be required for exiting.
- 3. The existing painted surfaces will be re-painted. Storefront framing, Parapet band, and landscape planters.

Legal Description:

East 75 feet of Lots 1-2, Block 7, Littleton County of Arapahoe, State of Colorado.

Notes:

- 1. Approval of a certificate of historic appropriateness (COA) shall be required prior to issuance of building permits for exterior work as shown on this plan.
- 2. Approval of a sketch plan (SP) shall be required prior to issuance of a building permit.
- 3. Signage shown on this plan is for illustrative purposes only and has not been reviewed for compliance with the sign code. A sign permit shall be submitted to the city for review and approval.
- 4. All glass shall be translucent and clear in color and shall match the existing glass.
- 5. The corrugated HVAC screen will be installed vertically.
- 6. The new door frames will match the existing door frames in framing width.

Drawing Index:

Sheet 1 of 7
Sheet 2 of 7
Sheet 3 of 7
Sheet 4 of 7
Sheet 5 of 7
Sheet 6 of 7
Sheet 7 of 7
Sheet 7 of 7
Sheet 8 of 7
Sheet 9 of 7
Sheet

Contact Information:

Owner: Katfish, llc Kal Murib 303-903-9232 kalmurib@gmail.com

Applicant:
Jackass Hill Brewery
Jeff Bennett
303-489-6932
rapidproducts@gmail.com

Architect:
SHArchitecture,llc
Jeff Malec
720-938-0751
sharch-llc@hotmail.com

Rooftop Mechanical Screening:

- 1. If the roof top units to be installed exceed the size of the roof top unit(s) as shown on the COA, a new COA application must be approved prior to its installation.
- 2. The building elevations shown and approved hereon are intended to demonstrate how all roof top units shall be screened. It is the applicant's responsibility to ensure that screening occurs in the field as demonstrated by these plans, regardless of curb requirements, mechanical plan changes, or other circumstances. Failure to provide screening may result in delay of final inspections and/or issuance of a certificate of occupancy.

CERTIFICATION OF OWNERSHIP:

develop the above described property in accordance with the use, restrictions, and conditions contained herein, and current ordinances, resolutions, and standards of the C
of Littleton, Colorado.
My fight
Signature of owner and/or agent
239 W MAINSI
Address UTPLE TON CO 80120
Acknowledgement:
State of Colorado)
County of Arapahoe)SS
The foregoing dedication was acknowledged before me this ghad as of June 2018 by Khaled Hazem Murib as Owner
Witness my hand and official seal.
Manay Clear water
My Commission Expires 10-22-19 NANCY CLEARWATER NOTARY PUBLIC - STATE OF COLORADO
My Identification # 19954014689
Expires October 22, 2019


I, HALED HIMIN, Sowner or designated agent thereto, does hereby agree to

CITY HISTORICAL PRESERVATION BOARD:

Approved this	_{s_} 21st	day of_	Мау	2018, by the Littleton Historical Preservation	
Board	uSigned by:				
Pan	uSigned by: 1Ua <i>G</i> V	ove			
Chair A38					
	(— DocuSign	-		
	Denise Ciernia				
4 5		D03BC259	132D426		
Attest: Record	ling Secr	etary			

COVER

SHEET 1 of 7

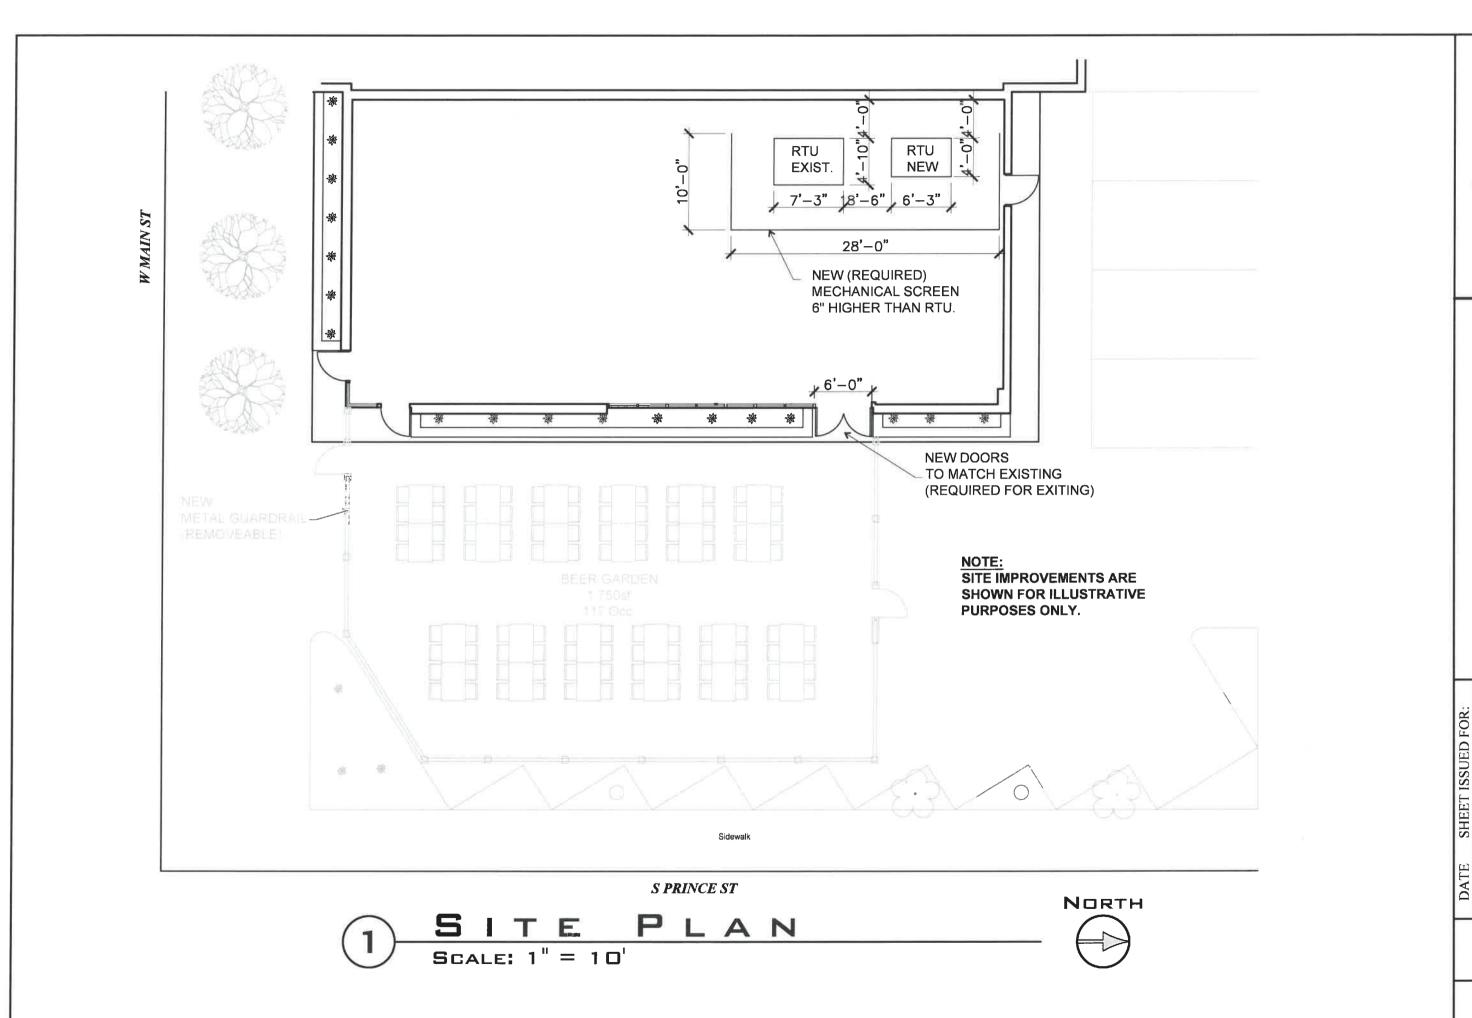


SHArchitecture, 1165 South Honey Way Denver, Colorado 80224 720-938-0751 Sharch-Ulc@hotmail.com

JACKASS HILL BREWERY
TENANT FINISH
2409 W. MAIN ST.
LITTLETON, COLORADO

8 COA — 1st submittal 8 COA — 2nd submittal 8 COA — 3rd submittal 8 COA — 4th submittal

SITE

SHEET 2 of 7

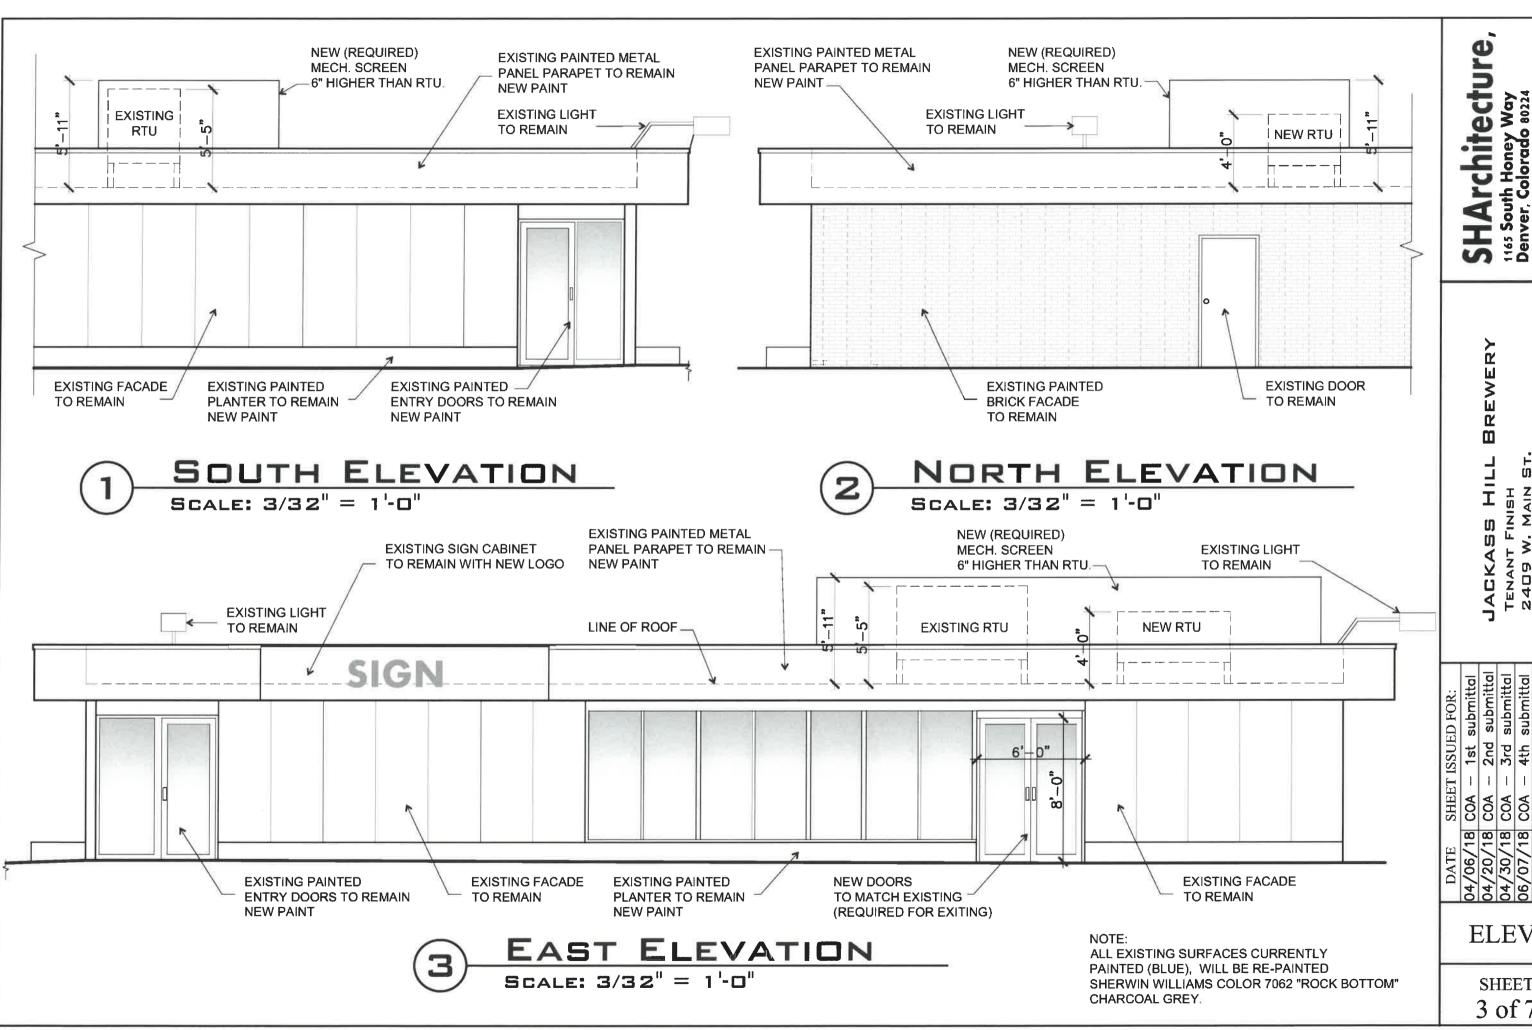

Denver, Colorado 80224 720-938-0751 Sharch-llc@hotmail.c

TENANT FINISH 2409 W. MAIN ST. LITTLETON, COLORADO


ELEV'S

SHEET 3 of 7





2 EXISTING NORTH FACADE

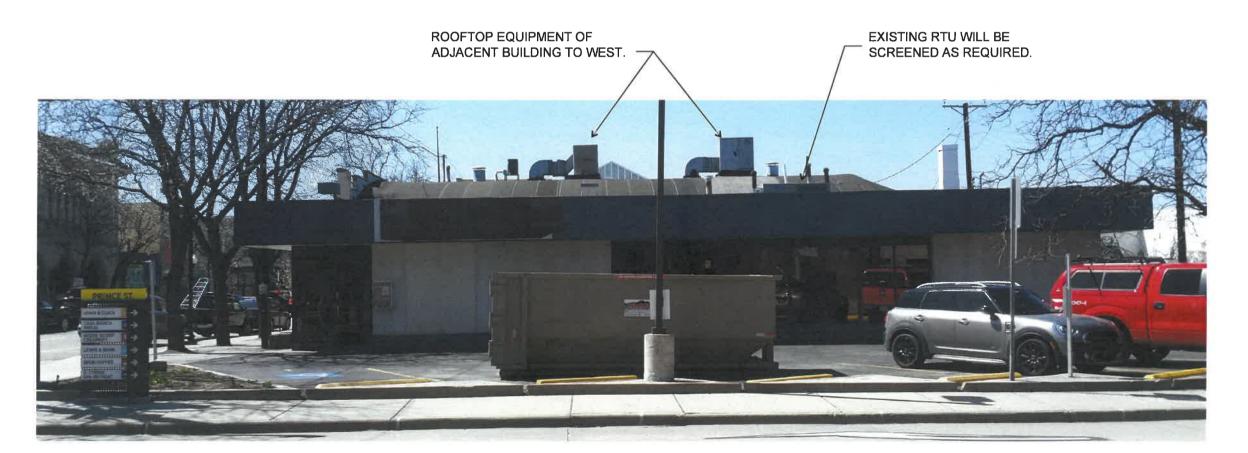

3 EXISTING EAST FACADE

NOTE:
ALL EXISTING SURFACES CURRENTLY
PAINTED (BLUE), WILL BE RE-PAINTED
SHERWIN WILLIAMS COLOR 7062 "ROCK BOTTOM"
CHARCOAL GREY.

HArchitecture South Honey Way

llc@hotmail

ACKASS HILL BREWERY TENANT FINISH 2409 W. MAIN ST. LITTLETON, GOLORADO

3/18 COA — 1st submittal 3/18 COA — 2nd submittal 3/18 COA — 3rd submittal 7/18 COA — 4th submittal

PICTURE

SHEET 4 of 7

1 EXISTING EAST FACADE

SIGN

NEW STOREFRONT DOORS TO MATCH EXISTING. WILL BE REPAINTED.

2 PROPOSED EAST FACADE

SHArchitecture, 1165 South Honey Way Denver, Colorado 80224 720-938-0751 Sharch-Uc@hotmail.com

ASS HILL BREWERY
T FINISH

TENANT FINISH 2409 W. MAIN ST. LITTLETON, COLORADO

16/18 COA — 1st submittal 10/18 COA — 2nd submittal 10/18 COA — 3rd submittal 17/18 COA — 4th submittal 17/18 COA — 4th submittal

PICTURE

SHEET 5 of 7

MECH. SCREEN WILL BE PAINTED.
SHERWIN WILLIAMS COLOR 7062 "ROCK BOTTOM"
CHARCOAL GREY.
OR CLOSEST MFG. STANDARD COLOR AND FINISH.

SHArchitecture, 1165 South Honey Way Denver, Colorado 80224 720-938-0751 Sharch-llc@hotmail.com


JACKASS HILL BREWERY
TENANT FINISH
2409 W. MAIN ST.
LITTLETON, COLORADO

ubmittal
Submittal
TENAN
TENAN

DATE SHEET ISSUED FOR:
04/06/18 COA — 1st submittal
04/20/18 COA — 2nd submittal
04/30/18 COA — 3rd submittal
06/07/18 COA — 4th submittal

MECH. SCREEN

SHEET 6 of 7

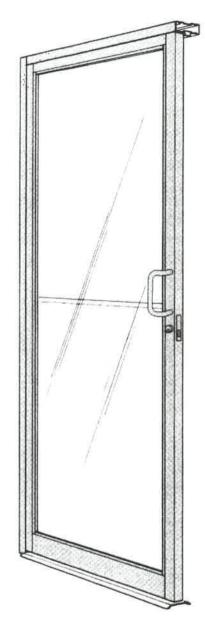

Description

Tubelite Standard Entrances have an outstanding reputation for craftsmanship and strength. The Narrow Stile Door has a face dimension of 2 1/8" and is designed for average commercial use. Medium Stile (4") and Wide Stile (5") Doors provide extra durability for heavier usage and a greater variety of hardware options. Optional bottom rail heights of 7 1/2" and 10" are available for accessibility requirements. Snap-in glass stops provide for 1/4" or 1" glazing thicknesses.

Standard Entrances are furnished with mortised butt hinges, offset pivots or center pivots as specified. Standard deadbolt locks, concealed vertical rod or rim panic exit devices may also be selected. Standard pull handles have been designed for ADA access and have matching push bars.

The standard door frame has snap-in door stops to conceal frame anchors and provide an excellent weatherseal. Open-back vertical door jambs allow easy, fast assembly with the screw-spline head member. Snap-in vertical frame closures easily accommodate addition of sidelights and incorporation with storefront framing.

TUBELITE

1000 R

2.02 Standard Entrances Specifications

General

Description

Fumish all necessary materials, labor and equipment for the complete installation of aluminum entrance doors, door frames and hardware as shown on the drawings and specified herein.

Doors and frames shall be as manufactured by Tubelite Inc., Reed City, Michigan. Whenever substitute products are to be considered, supporting technical literature, samples, drawings and performance data must be submitted ten (10) days prior to bid in order to make a valid comparison of the products involved.

Test reports certified by an independent laboratory must be made available upon request.

Products

Materials

Extrusions shall be of aluminum alloy 6063-T5 extruded within commercial tolerance and free from defects impairing strength and/or durability. Door stile and rail sections to be a minimum of .125 inch wall thinkness. Door frame sections to be of .080 inch minimum wall thickness, with glazing and door moldings a minimum of .050 inch.

Steel tension rods of .375 inch diameter shall run the full width of the top and bottom rails and shall be fixed with steel plates and lock nuts.

Door glazing shall be by means of an interior and exterior fixed gasket of high quality extruded elastomeric material. Door frame members shall have a continuous wool pile weatherstripping at the head and jamb members. Bottom rail weathersweep at threshold optional (architect specify). Door stops shall be of snap-in design on butt hinge and offset pivot applications, eliminating use of exposed screws.

All door and frame members shall be

accurately fitted to flush hairline joints.
All Stock (Narrow Stile) Doors shall have an adjustable setting block in the top rail.

Hardware

Stock Entrance Doors and Frames shall have standard hardware as furnished by Tubelite* as follows:

Butt	Hinges	
	P-092	Ball Bearing Butt Hinges
	P-1565	Push Bar
		Pull Handle
	E-0019	½" x 4" Threshold
	P-1420	Deadbolt MS Lock
	P-1409	Lock Faceplate, or
	P-1408	Lock Faceplate (Pairs of Doors)
	P-1438	Tubelite/LCN Surface Mount
		Closer
	P-059	Flush Bolts (Pairs of Doors)

Offset Pivots
P-694 Top and Bottom Pivots

P-1565 Push Bar
P-1564 Pull Handle
E-0019 1/2" x 4" Threshold
P-1420 Deadbolt MS Lock
P-1409 Lock Faceplate, or
P-1408 Lock Faceplate (Pairs of Doors)
P-1438 Tubelite/LCN Surface Mount
Closer

P-059 Flush Bolts (Pairs of Doors)

Center Pivots
P-970 Concealed Overhead Closer with
Bottom Pivot
P-1565 Push Bars

E-0019 ½" x 4" Threshold P-1420 Deadbolt MS Lock P-1409 Lock Faceplate, or P-1408 Lock Faceplate (Pairs of Doors) P-059 Flush Bolts (Pairs of Doors)

Special hardware for custom doors and entrances shall be specified by the architect. Hardware furnished by others shall be sent to the door manufacturer for application.

Finish

All exposed framing surfaces shall be free of scratches and other serious blemishes.

Finish to be: (architect select)

Etched and clear anodized
(AA-M12C22A31) –
Clear (OA)

Electrolytically deposited color
(AA-M12C22A44) –
Champagne (4K)
Light Amber (2K)
Amber (1K)
Statuary Bronze (3K)
Black (OD)

Fluoropolymer painted color

Execution

Installation

Shall be in accordance with the manufacturer's installation instructions and the approved shop drawings.

Note:

In keeping with Tubelite's policy of continuing product improvements, all specifications are subject to change without written notice by the manufacturer.

SHArchitecture,
1165 South Honey Way
Denver, Colorado 80224
720-938-0751
Sharch-IL@hotmail.com

JACKASS HILL BREWERY
TENANT FINISH
2409 W. MAIN ST.
LITTLETON, COLORADO

ATE SHEET ISSUED FOR:

06/18 COA — 1st submittal

20/18 COA — 2nd submittal

30/18 COA — 3rd submittal

07/18 COA — 4th submittal

DOORS

SHEET 7 of 7

TUBELITE'

1998